



ICE24S65L N-Channel Enhancement Mode MOSFET

Features

- Low $r_{DS(on)}$
- Ultra Low Gate Charge
- High dv/dt capability
- High Unclamped Inductive Switching (UIS) capability
- High peak current capability
- Optimized design for hard switching SMPS topologies



Product Summary			
I_D	$T_c=25^\circ\text{C}$	24A	Max
BV_{DSS}	$I_D=250\mu\text{A}$	650V	Min
$r_{DS(on)}$	$V_{GS}=10\text{V}$	0.128 Ω	Typ
Q_g	$V_{DS}=480\text{V}$	34nC	Typ



DFN8x8

- 1 = Gate
- 2 = Sense Source
- 3 - 4 = Power Source
- 5 = Drain

ICEMOS AND ITS SISTER COMPANY 3D SEMI OWN THE FUNDAMENTAL PATENTS FOR SUPERJUNCTION MOSFETS. THE MAJORITY OF THESE PATENTS HAVE 17 TO 20 YEARS OF REMAINING LIFE. THIS PORTFOLIO HAS GRANTED PATENTS ISSUED IN USA, CHINA, KOREA, JAPAN, TAIWAN & EUROPE.

Maximum ratings * at $T_j=25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
Continuous drain current	I_D	$T_c=25^\circ\text{C}$ $T_c=100^\circ\text{C}$	24 15.2	A
Pulsed drain current	$I_{D, pulse}$	$T_c=25^\circ\text{C}$	72	A
Avalanche energy, single pulse	E_{AS}	$I_D=8\text{A}$	320	mJ
Avalanche current, repetitive	I_{AR}	limited by T_j max	8	A
MOSFET dv/dt ruggedness	dv/dt	$V_{DS}=480\text{V}$, $I_D=24\text{A}$, $T_j=125^\circ\text{C}$	50.0	V/ns
Gate source voltage	V_{GS}	Static	± 20	V
		AC ($f>1\text{Hz}$)	± 30	
Power dissipation	P_{tot}	$T_c=25^\circ\text{C}$	232	W
Operating and storage temperature	T_j, T_{stg}		-55 to +150	$^\circ\text{C}$

* Preliminary Data Sheet – Specifications subject to change

Parameter	Symbol	Conditions	Values			Unit
			Min	Typ	Max	

Thermal characteristics

Thermal resistance, junction-case ^a	R_{thJC}		-	-	0.54	°C/W
Thermal resistance, junction-ambient ^a	R_{thJA}	leaded	-	-	62	
Soldering temperature, wave soldering only allowed at leads	T_{sold}	1.6mm (0.063in.) from case for 10 s	-	-	260	°C

Electrical characteristics at $T_j=25^\circ\text{C}$, unless otherwise specified

Static characteristics

Drain-source breakdown voltage	$V_{(BR)DSS}$	$V_{GS}=0\text{ V}, I_D=250\mu\text{A}$	650	700	-	V
Gate threshold voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250\mu\text{A}$	2.5	3	3.5	
Zero gate voltage drain current	I_{DSS}	$V_{DS}=650\text{V}, V_{GS}=0\text{V}, T_j=25^\circ\text{C}$	-	0.1	1	μA
		$V_{DS}=650\text{V}, V_{GS}=0\text{V}, T_j=150^\circ\text{C}$	-	100	-	
Gate source leakage current	I_{GSS}	$V_{GS}=\pm 20\text{ V}, V_{DS}=0\text{V}$	-	-	100	nA
Drain-source on-state resistance	$r_{DS(on)}$	$V_{GS}=10\text{V}, I_D=12.0\text{A}, T_j=25^\circ\text{C}$	-	0.128	0.141	Ω
		$V_{GS}=10\text{V}, I_D=12.0\text{A}, T_j=150^\circ\text{C}$	-	0.363	-	
Gate resistance	R_G	$f=1\text{ MHz}, \text{open drain}$	-	0.85	-	Ω

Dynamic characteristics

Input capacitance	C_{iss}	$V_{GS}=0\text{ V}, V_{DS}=25\text{V}, f=1\text{ MHz}$	-	1650	-	pF
Output capacitance	C_{oss}		-	234	-	
Reverse transfer capacitance	C_{rss}		-	3	-	
Output capacitance	C_{oss}	$V_{GS}=0\text{ V}, V_{DS}=100\text{ V}, f=1\text{ MHz}$	-	73	-	
Transconductance	g_{fs}	$V_{DS}>2 \cdot I_D \cdot R_{DS}, I_D=12.0\text{A}$	-	23	-	S
Turn-on delay time	$t_{d(on)}$	$V_{DS}=380\text{V}, V_{GS}=10\text{V}, I_D=12\text{A}, R_G=4\Omega \text{ (External)}$	-	22.1	-	ns
Rise time	t_r		-	7.4	-	
Turn-off delay time	$t_{d(off)}$		-	46.7	-	
Fall time	t_f		-	2.1	-	

^a When mounted on 1inch square 2oz copper clad FR-4

Parameter	Symbol	Conditions	Values			Unit
			Min	Typ	Max	


Gate charge characteristics

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Gate to source charge	Q_{gs}	$V_{DS}=480\text{ V}, I_D=24\text{ A},$ $V_{GS}=10\text{ V}$	-	7	-	nC
Gate to drain charge	Q_{gd}		-	7	-	
Gate charge total	Q_g		-	34	-	
Gate plateau voltage	$V_{plateau}$		-	5.0	-	V


Reverse Diode

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Continuous forward current	I_S	$V_{GS}=0\text{ V}$	-	-	24	A
Diode forward voltage	V_{SD}	$V_{GS}=0\text{ V}, I_S=I_F$	-	1.0	1.2	V
Reverse recovery time	t_{rr}	$V_{RR}=50\text{ V}, I_S=I_F,$ $d_{iF}/d_t=100\text{ A}/\mu\text{S}$	-	326	-	ns
Reverse recovery charge	Q_{rr}		-	5.6	-	μC
Peak reverse recovery current	I_{rm}		-	38	-	A


Output Characteristics

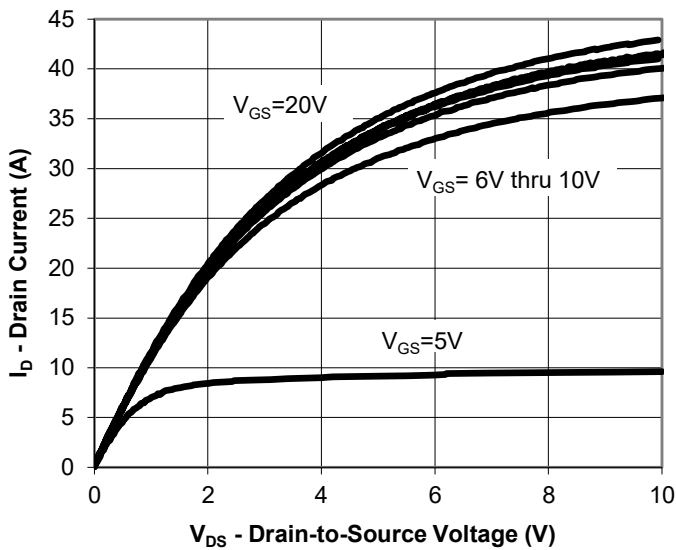


Transfer Characteristics

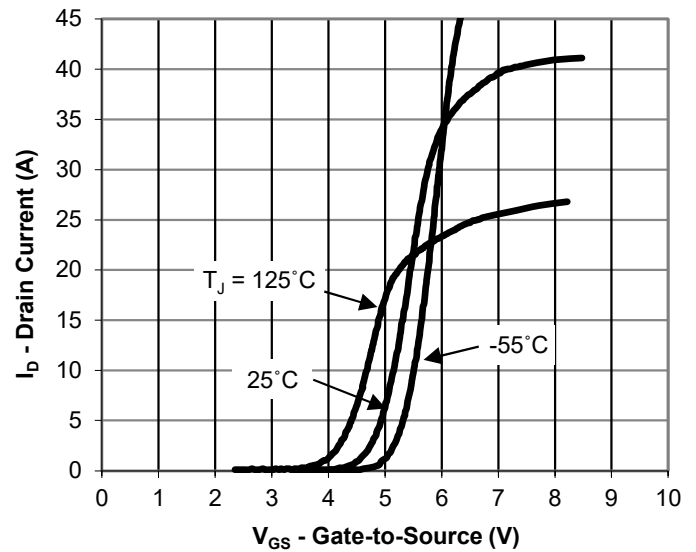


Drain-Source On-State Resistance vs. Drain Current

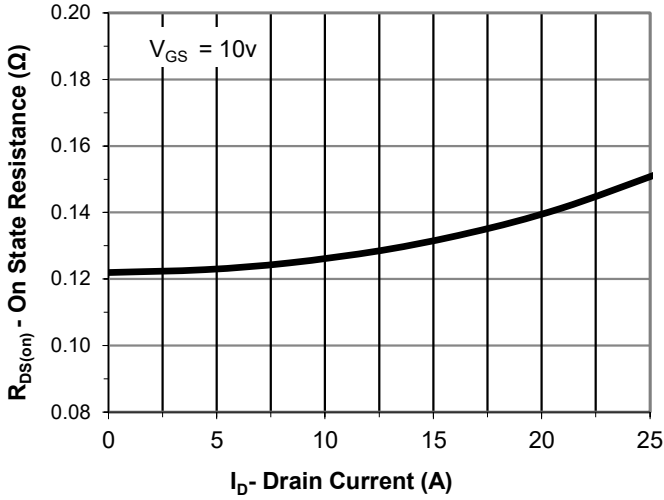


Drain-Source On-State Resistance vs. Gate-to-Source Voltage

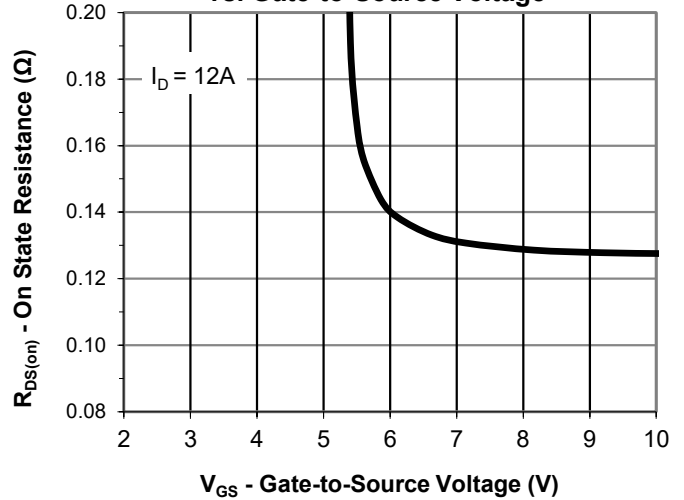


Drain-Source On State Resistance vs. Junction Temperature

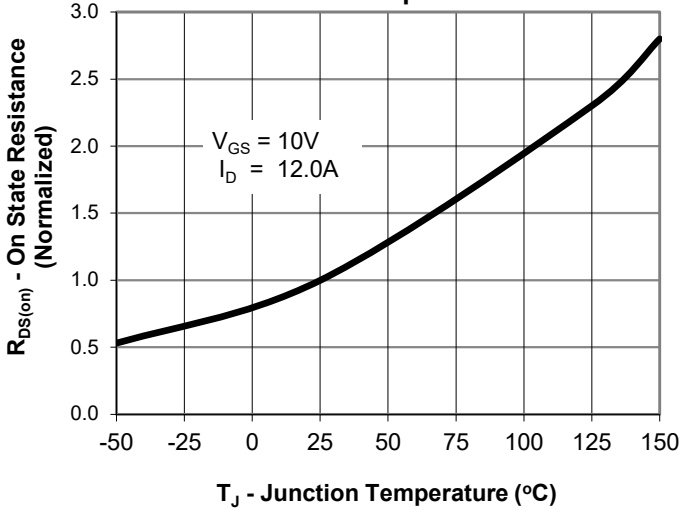


Gate Threshold Voltage vs. Junction Temperature

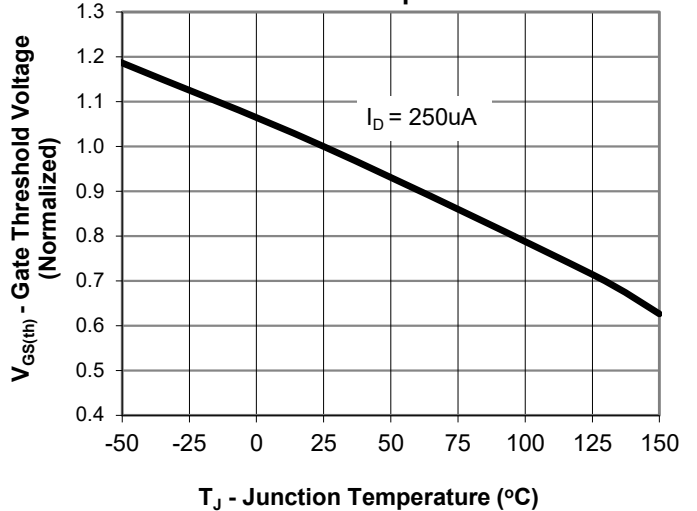


Gate Charge

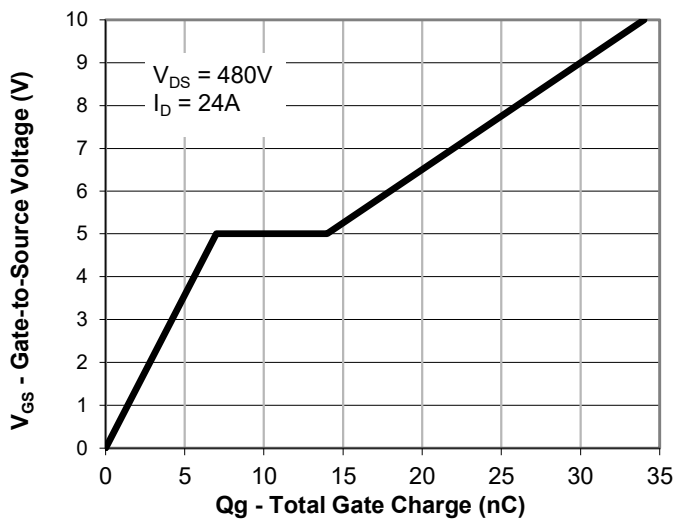


Drain-to-Source Breakdown Voltage vs. Junction Temperature

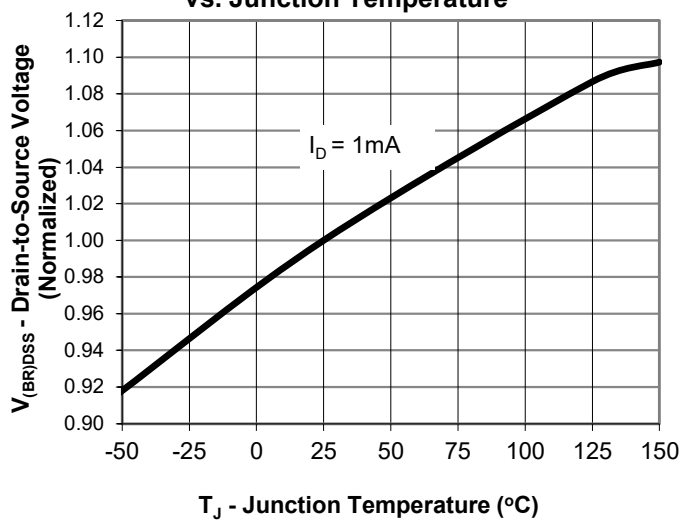


Capacitance

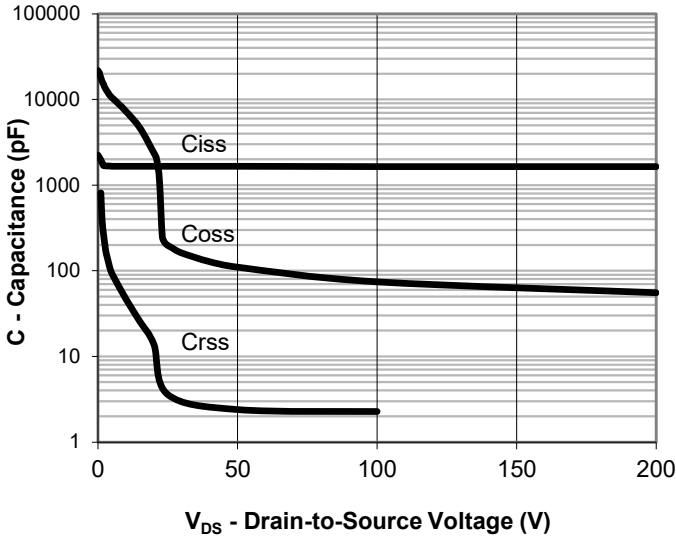


Source-Drain Diode Forward Voltage

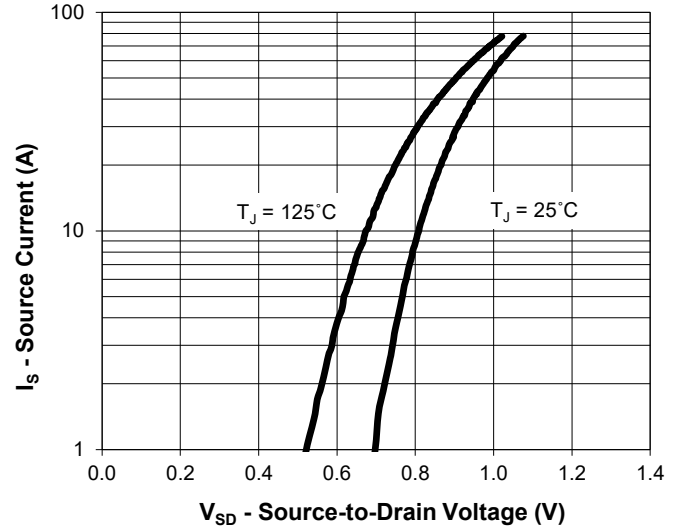


Maximum Rated Forward Biased Safe Operating Area

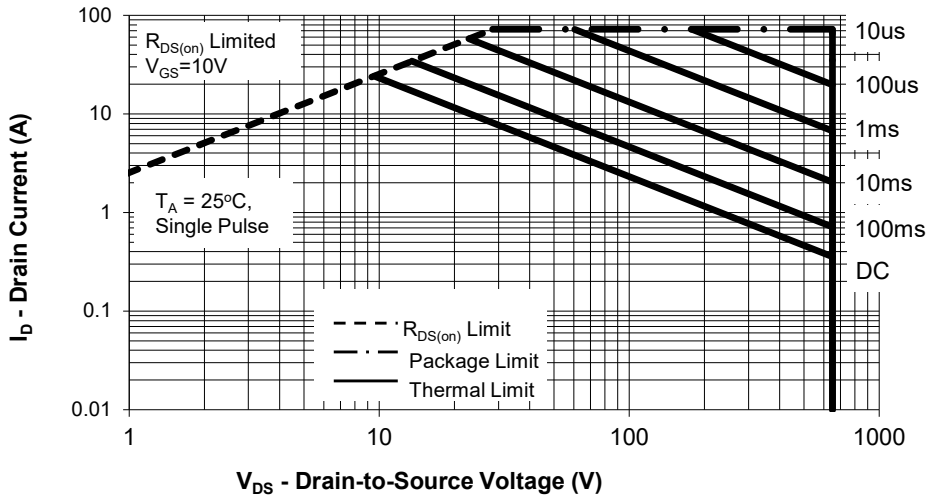

Transient Thermal Response, Junction-to-Ambient

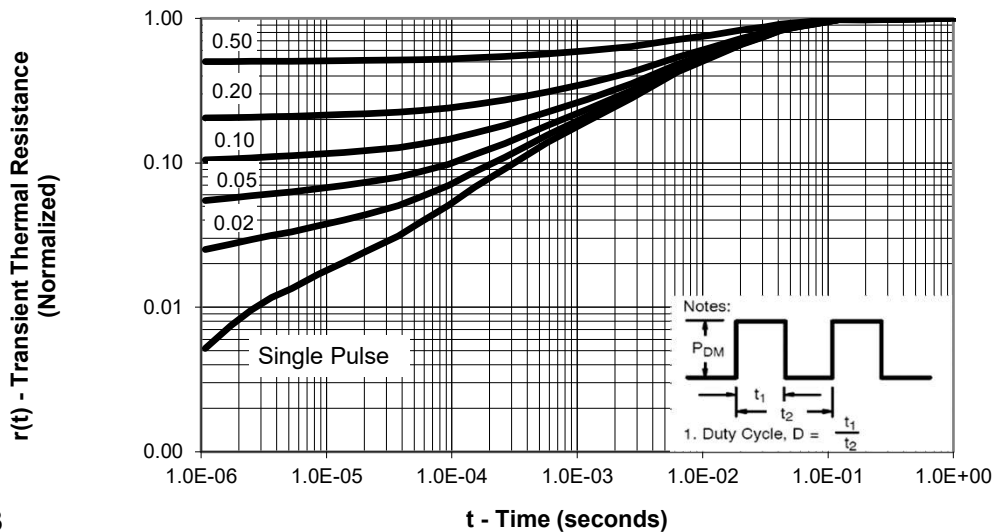

Package Outline: DFN8x8

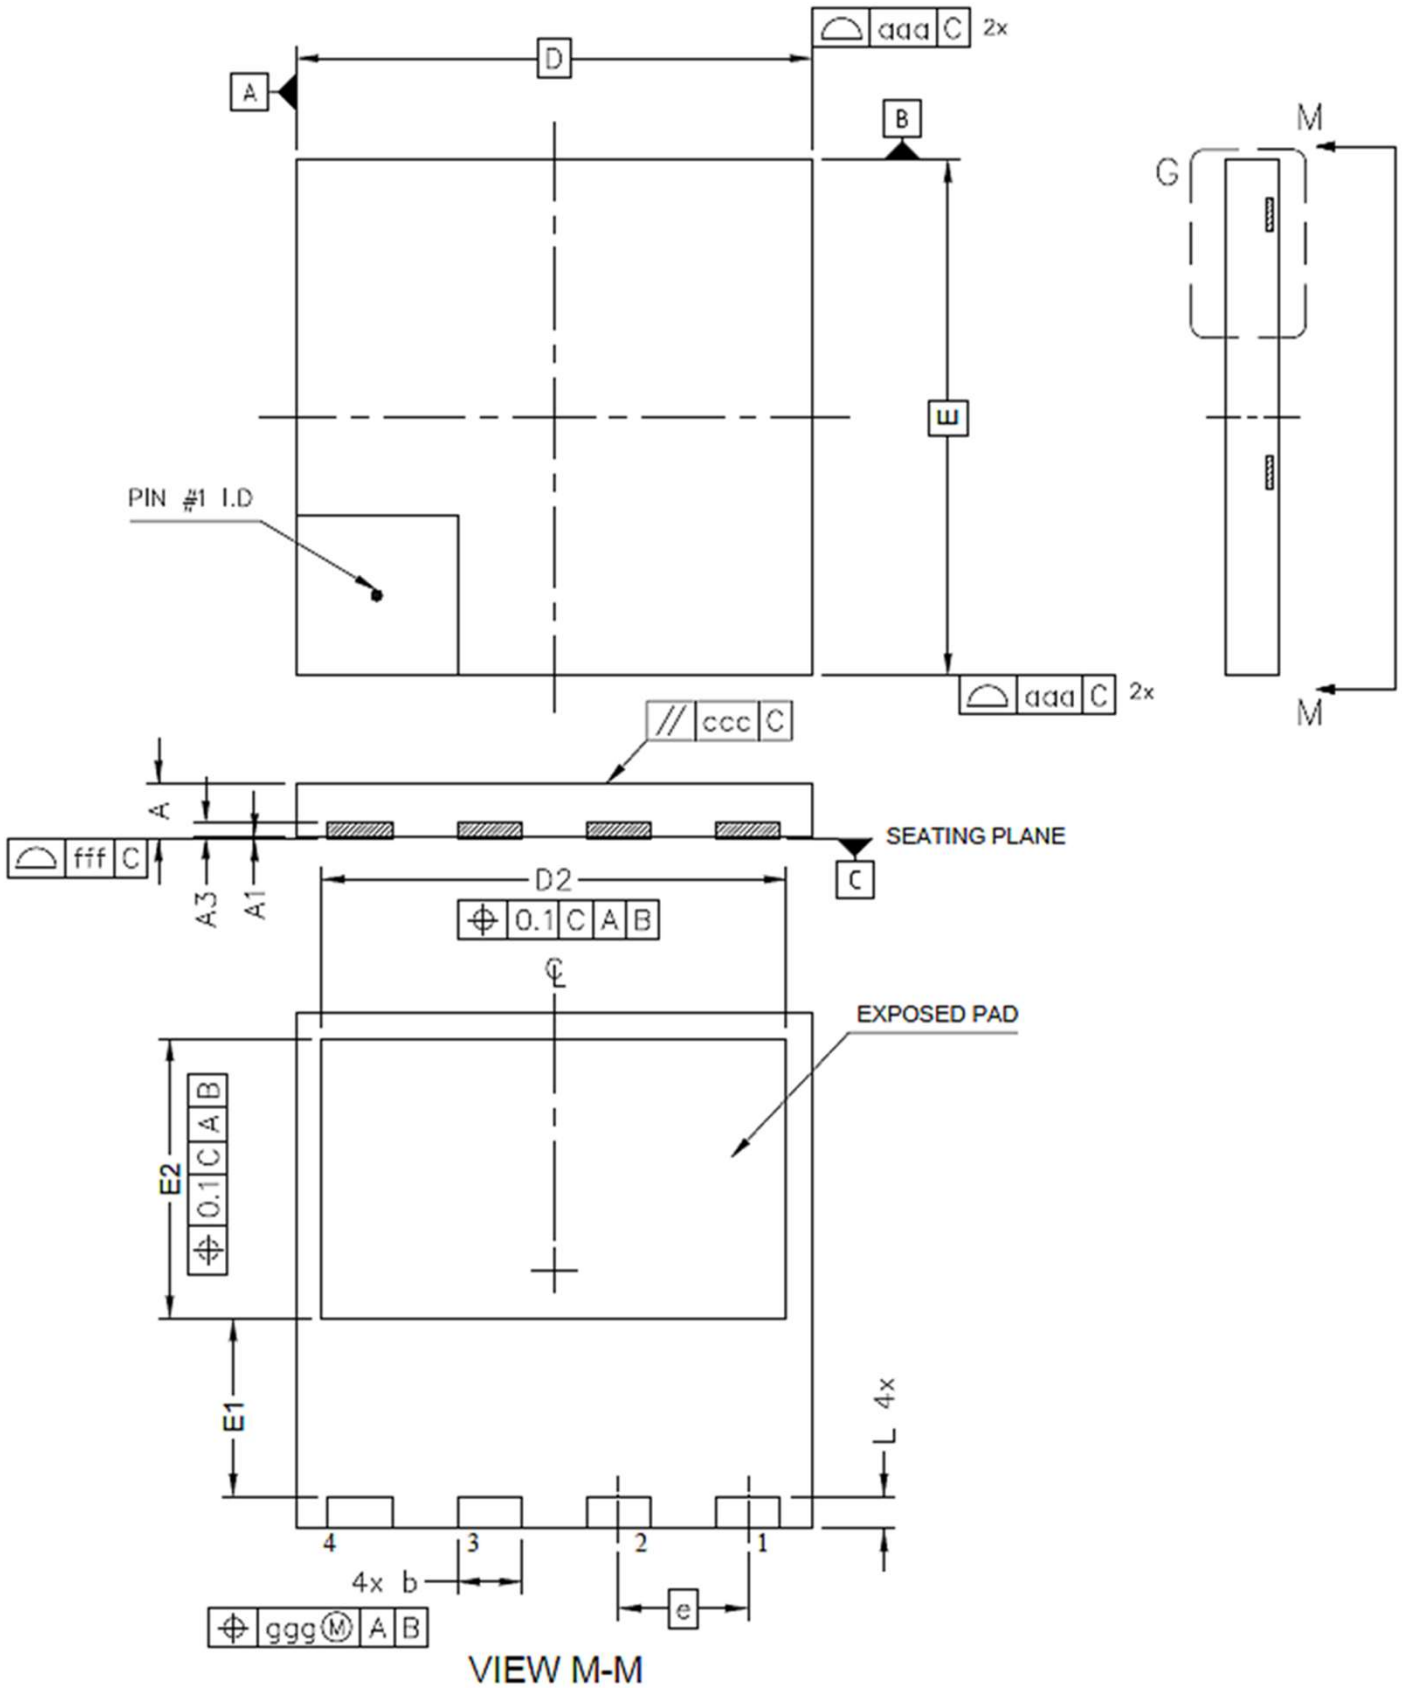


Package Outline: DFN8x8

SYMBOL	MIN	MAX	NOTES
A	0.75	0.95	1.0 DIMENSIONING & TOLERANCEING CONFIRM TO ASME Y14.5M-1994.
A1	0.00	0.05	
A3	0.10	0.30	
b	0.90	1.10	
D	7.90	8.10	
E	7.90	8.10	
D2	7.10	7.30	2.0 ALL DIMENSIONS ARE IN MILLIMETERS. ANGLES ARE IN DEGREES.
E1	2.65	2.85	3.0 DIMENSION b APPLIES TO METALLIZED TERMINAL AND IS MEASURED BETWEEN 0.90mm AND 1.10mm FROM TERMINAL TIP.
E2	4.25	4.45	
e	2.00 BSC		4.0 DIMENSIONS DO NOT INCLUDE BURRS OR MOLD FLASH.
L	0.40	0.60	
aaa	0.10		5.0 COPLANARITY APPLIES TO THE EXPOSED HEAT SLUG AS WELL AS THE TERMINAL.
ggg	0.05		
ccc	0.05		
fff	0.05		
			6.0 RADIUS ON TERMINAL IS OPTIONAL.

Tape and Reel : DFN8x8

Reel size : 13 inch
QTY per reel : 3000pcs

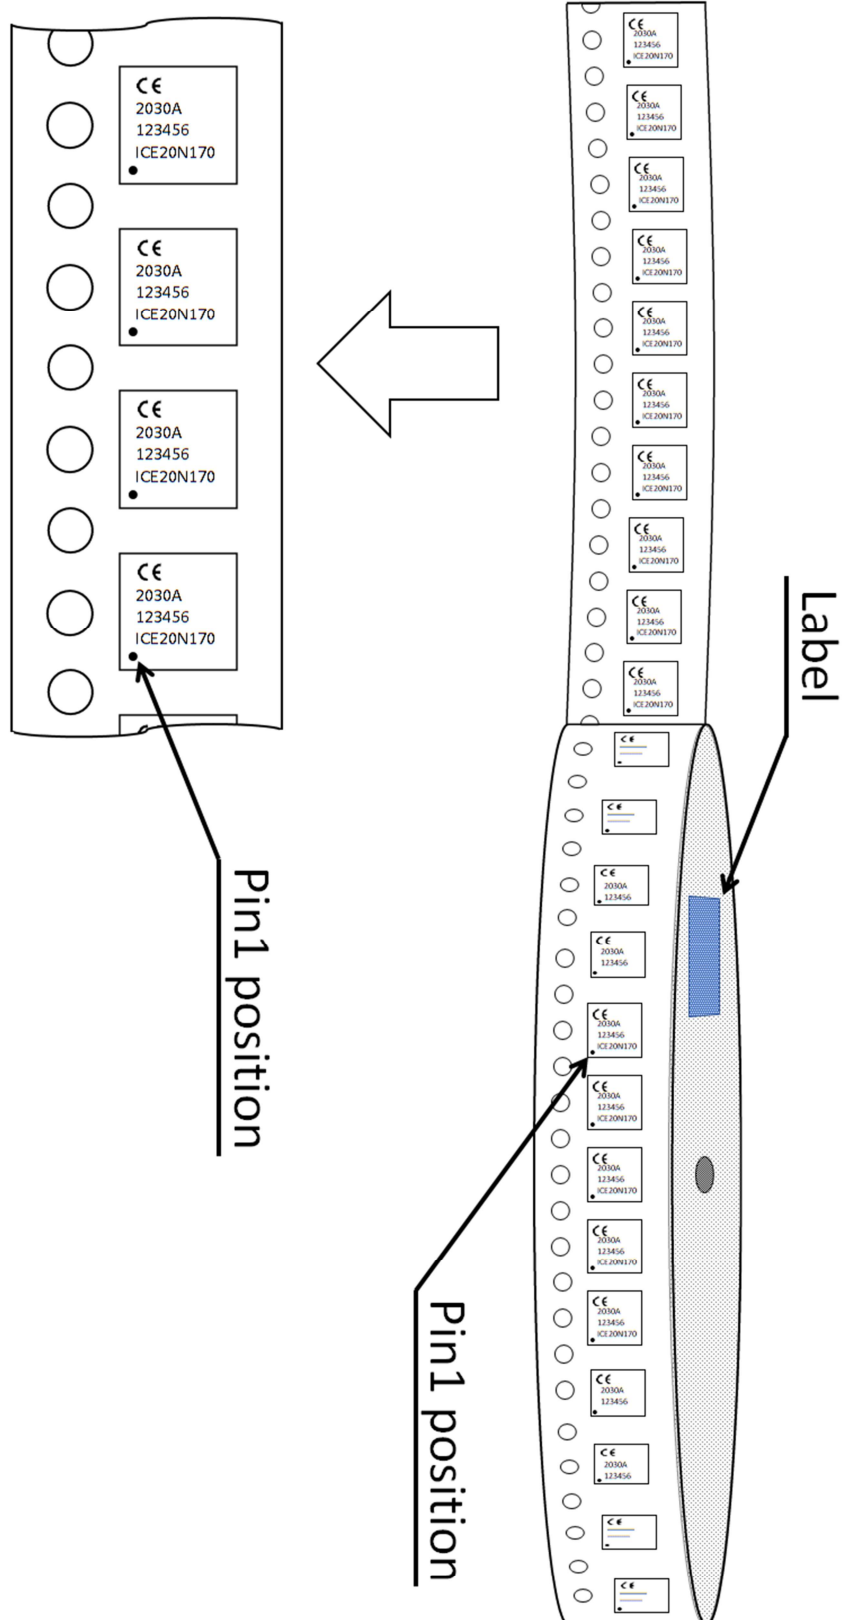

ICEMOS SUPERJUNCTION PATENT PORTFOLIO

ICEMOS GRANTED PATENTS

US7,429,772

US7,439,178

US7,446,018

US7,579,607

US7,723,172

US7,795,045

US7,846,821

US7,944,018

US8,012,806

US8,030,133

3D SEMI PATENTS LICENSED TO ICEMOS

US7,041,560B2

US7,023,069B2

US7,364,994

US7,227,197B2

US7,304,944B2

US7,052,982B2

US7,339,252

US7,410,891

US7,439,583

US7,227,197B2

US6,635,906

US6,936,867

US7,015,104

US9,109,110

US7,271,067

US7,354,818

US7,052,982,

US7,199,006B2

Note: additional patents in China, Korea, Japan, Taiwan, Europe have also been granted to IceMOS and 3D Semi for Superjunction MOSFETs with 70 additional Patent applications in process in the USA and the above listed countries.


Marking Information

YY = Last two digits of the year

WW = Work week

***** = Site ID

XXXXX = Lot ID



ICE24S65 = ICE is IceMOS logo and
24S65 is a designated device part
number

Disclaimer

Information contained in this data sheet shall in no event be regarded as a guarantee of conditions or characteristics. All product, data sheet are subject to change without notice to improve reliability. ICEMOS technology will not be responsible for damages of any nature resulting from the use or reliance upon the information contained in this data sheet.