IceMOS Technology

Preliminary
ICEK070GL10LK

ICEK070GL10LK N-Channel Enhancement Mode MOSFET

Product Summary			
I_D	T_A=25°C	60A	Max
$V_{(BR)DSS}$	I_D=250μA	100V	Min
$r_{DS(on)}$	V_{GS}=10V	5.8mΩ	Typ
Q_g	V_{DS}=50V	39nC	Typ

Features

- Very low on-resistance (R_{DSON})
- Superior UIS performance
- Optimized design for Adapter and Fast Charger, DC-DC Converter, Synchronous rectification and Micro inverter





DFN5x6

1-3=Source

4=Gate, 5-8=Drain

RoHS COMPLIANT RoHS (EU) 2015/863

CE

HALOGEN FREE

Maximum ratings [a] at T_j=25°C, unless otherwise specified

Parameter	*Symbol*	*Conditions*	*Value*	*Unit*
Continuous drain current [b]	I_D	T_c=25°C silicon limit	77.4	A
		T_c=25°C package limit	60	
		T_c=100°C	48.9	
Pulsed drain current [b]	$I_{D,\ pulse}$	T_c=25°C	240	A
Avalanche energy, single pulse	E_{AS}	L=0.5mH, V_{DD}=50V, I_D=20A, R_G=50Ω	100	mJ
Avalanche current, repetitive [b]	I_{AR}	limited by $T_j$max	20	A
Gate source voltage	V_{GS}	Static	±20	V
		AC (f>1Hz)		
Power dissipation	P_{tot}	T_c=25°C	72.6	W
Operating and storage temperature	T_j, T_{stg}		-55 to +150	°C

a Preliminary data sheet - Specifications subject to change.
b limited by Tj_{max}
c when mounted on 1-inch square 2oz copper-clad FR-4

Parameter	Symbol	Conditions	Values			Unit
			Min	Typ	Max	
Thermal characteristics						
Thermal resistance, junction-case	R_{thJC}		-	-	1.72	°C/W
Thermal resistance, junction-ambient [c]	R_{thJA}	leaded	-	-	50	
Soldering temperature, wave soldering only allowed at leads	T_{sold}	1.6mm (0.063in.) from case for 10 s	-	-	260	°C

Electrical characteristics at T_j=25°C, unless otherwise specified

Static characteristics						
Drain-source breakdown voltage	$V_{(BR)DSS}$	V_{GS}=0V, I_D=250μA	100	-	-	V
Gate threshold voltage	$V_{GS(th)}$	V_{DS}=V_{GS}, I_D=250μA	1	1.9	3	
Zero gate voltage drain current	I_{DSS}	V_{DS}=100V, V_{GS}=0V	-	-	1	μA
Gate source leakage current	I_{GSS}	V_{GS}=±20V, V_{DS}=0V	-	-	±100	nA
Drain-source on-state resistance	$R_{DS\ (on)}$	V_{GS}=10V, I_D=20A	-	5.8	7	mΩ
Gate resistance	R_G	f=1 MHz, open drain	-	1.6	-	Ω
Dynamic characteristics						
Input capacitance	C_{iss}	V_{DS}=50V, V_{GS}=0V, f=1 MHz	-	2185	-	pF
Output capacitance	C_{oss}		-	710	-	
Reverse transfer capacitance	C_{rss}		-	25	-	
Turn-on delay time	$t_{d(on)}$	V_{DS}=50V, R_L=3.8Ω, V_{GS}=10V, R_G=6.8Ω (External)	-	11	-	ns
Rise time	t_r		-	21	-	
Turn-off delay time	$t_{d(off)}$		-	44	-	
Fall time	t_f		-	25	-	

Parameter	Symbol	Conditions	Values			Unit
			Min	Typ	Max	
Gate charge characteristics						
Gate to source charge	Q_{gs}	V_{DS}=50V, I_D=40A, V_{GS}=0 to 10V	-	6	-	nC
Gate to drain charge	Q_{gd}		-	10	-	
Gate charge total	Q_g		-	39	-	
Reverse Diode						
Continuous forward current	I_S	V_{GS}=0V	-	-	60	A
Diode forward voltage	V_{SD}	V_{GS}=0V, I_S=20A	-	0.84	-	V
Reverse recovery time	t_{rr}	V_{RR}=50V, I_S=40A, d_{iF}/d_t=100 A/µS	-	52	-	ns
Reverse recovery charge	Q_{rr}		-	80	-	nC
Peak reverse recovery current	I_{rm}		-	2.5	-	A

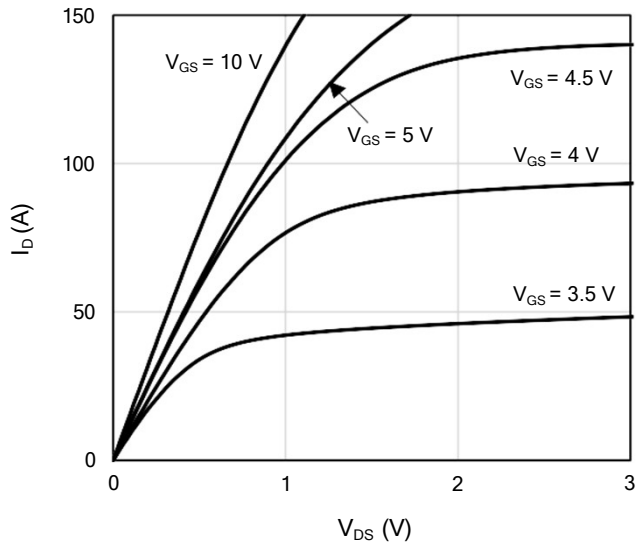

Figure 1: On-Region Characteristics

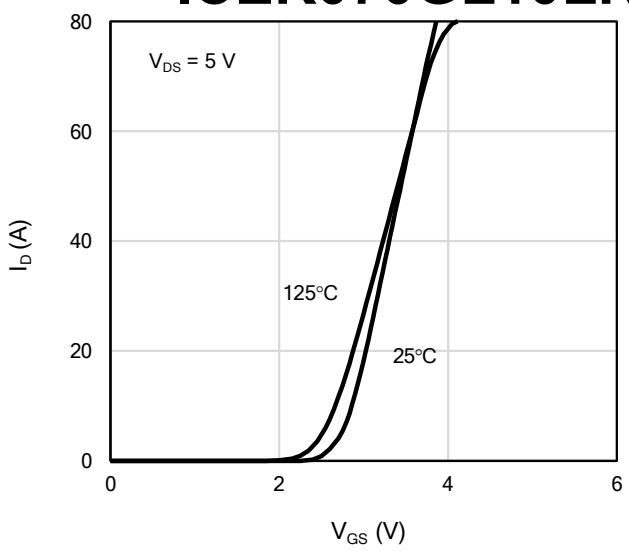

Figure 2: Transfer Characteristics

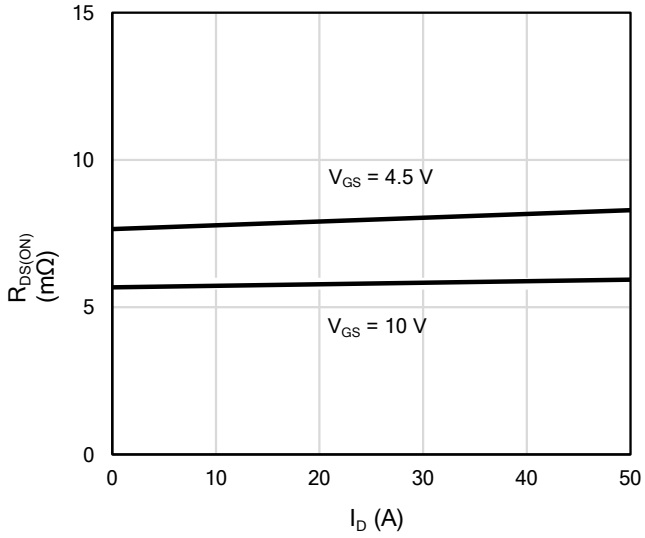

Figure 3: On-Resistance vs. Drain Current and Gate Voltage

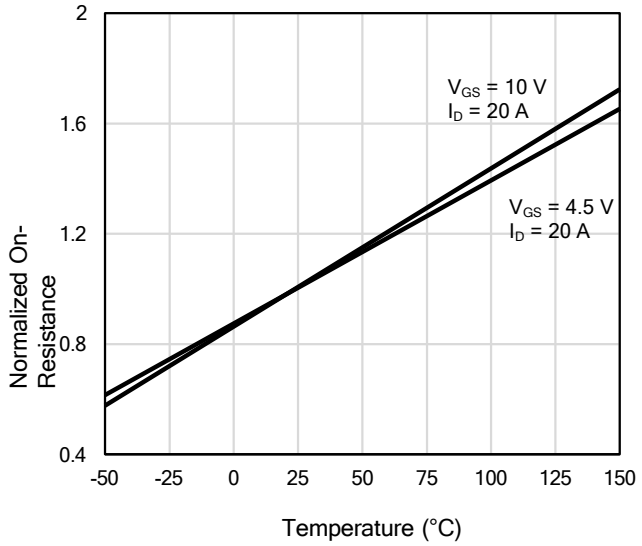

Figure 4: On-Resistance vs. Junction Temperature

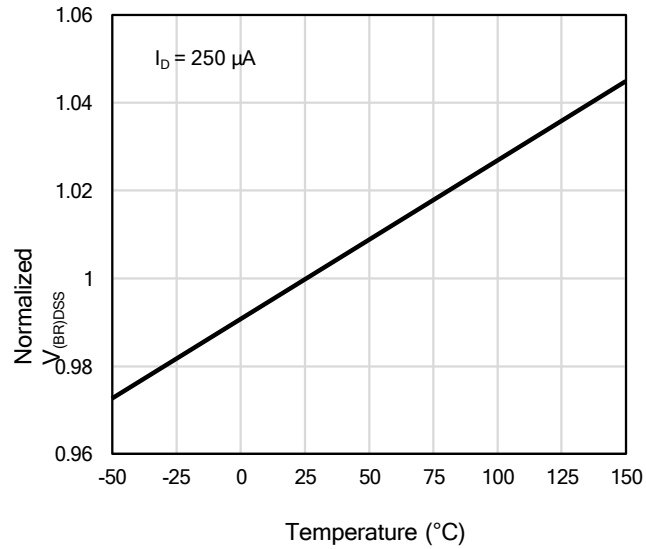

Figure 5: Breakdown Voltage vs. Junction Temperature

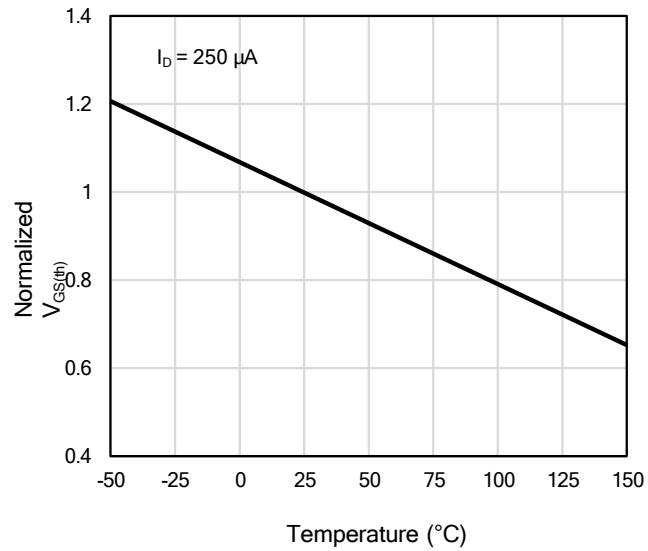

Figure 6: Threshold Voltage vs. Junction Temperature

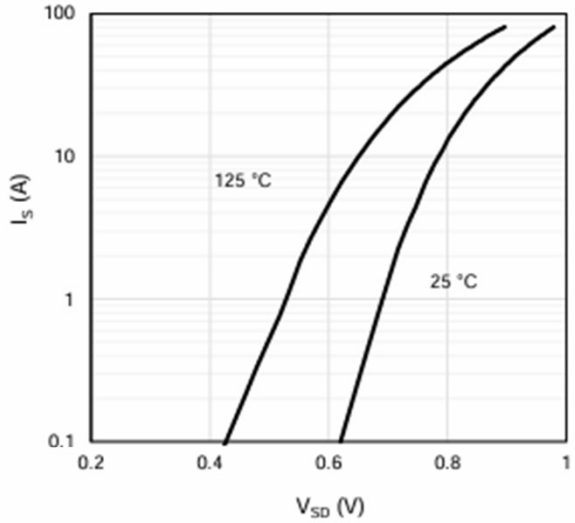

Figure 7: Body-Diode Characteristics

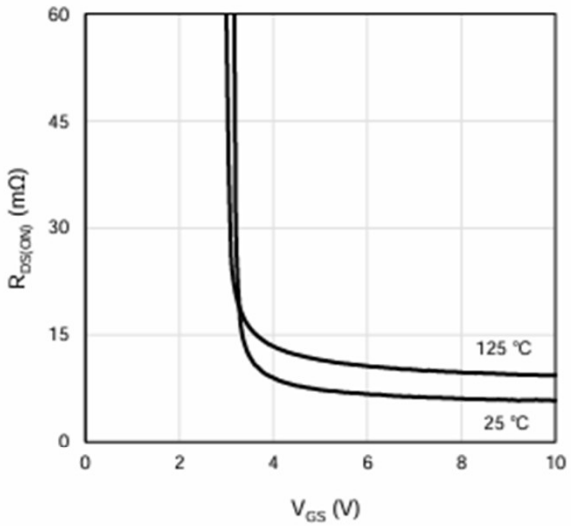

Figure 8: On-Resistance vs. Gate-Source Voltage

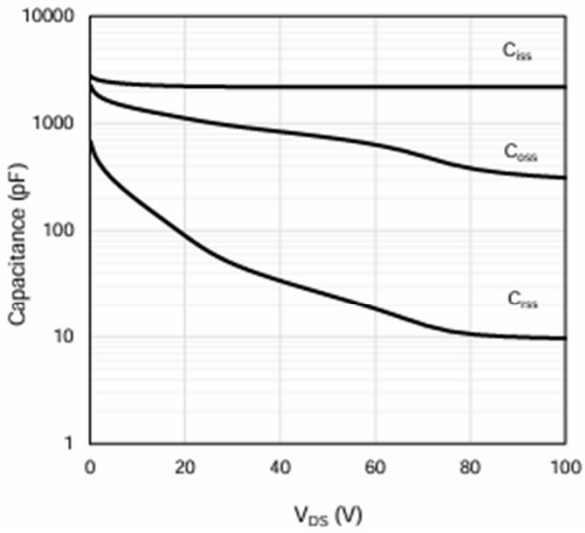

Figure 9: Capacitance Characteristics

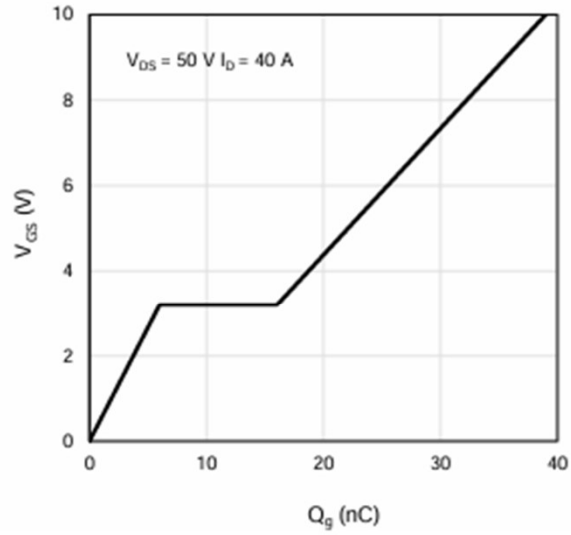

Figure 10: Gate-Charge Characteristics

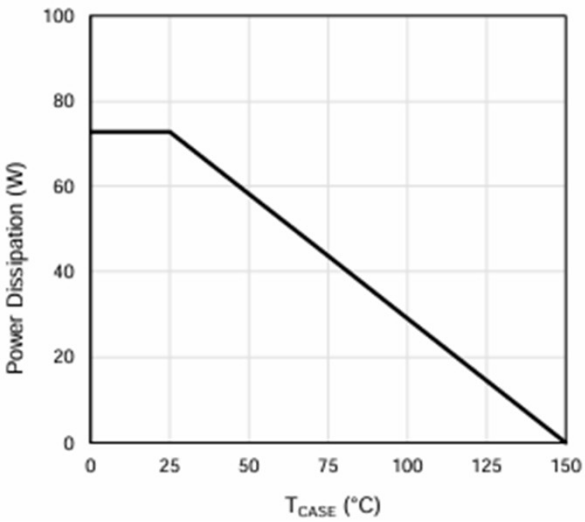

Figure 11: Power De-rating

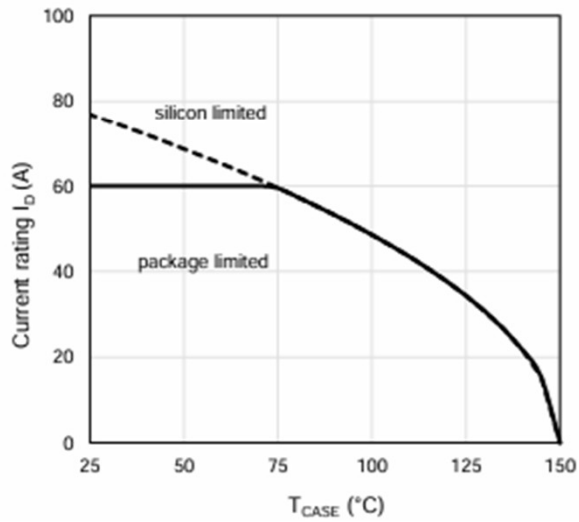

Figure 12: Current De-rating

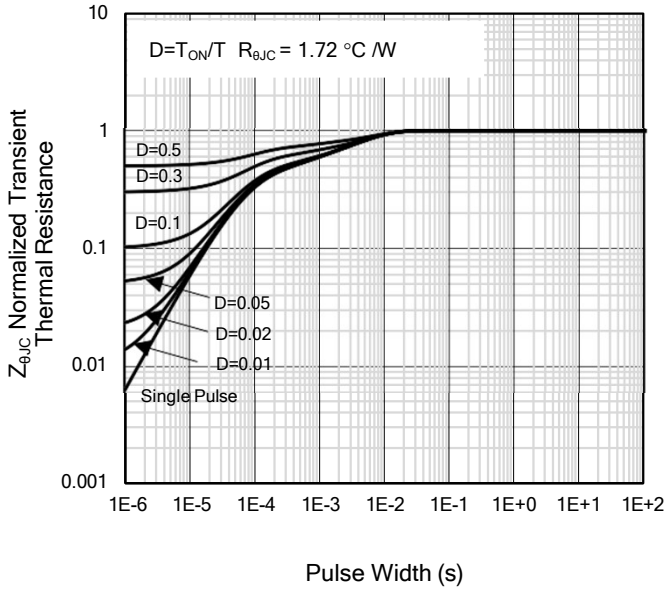

Figure 13: Normalized Maximum Transient Thermal Impedance

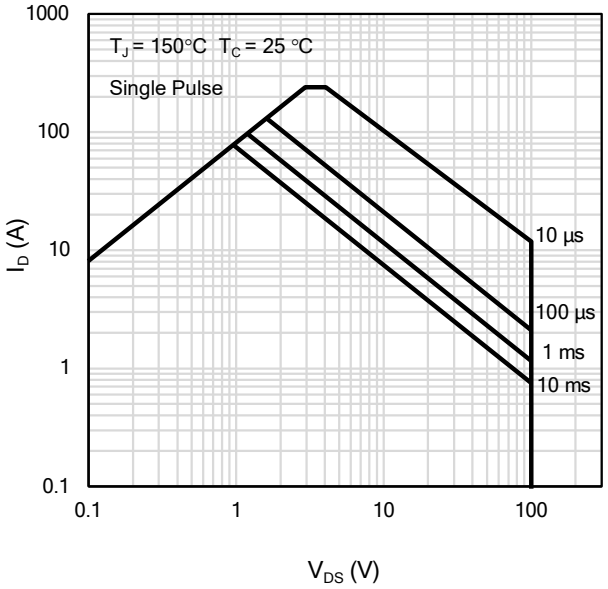

Figure 14: Maximum Forward Biased Safe Operating Area

Package Outline

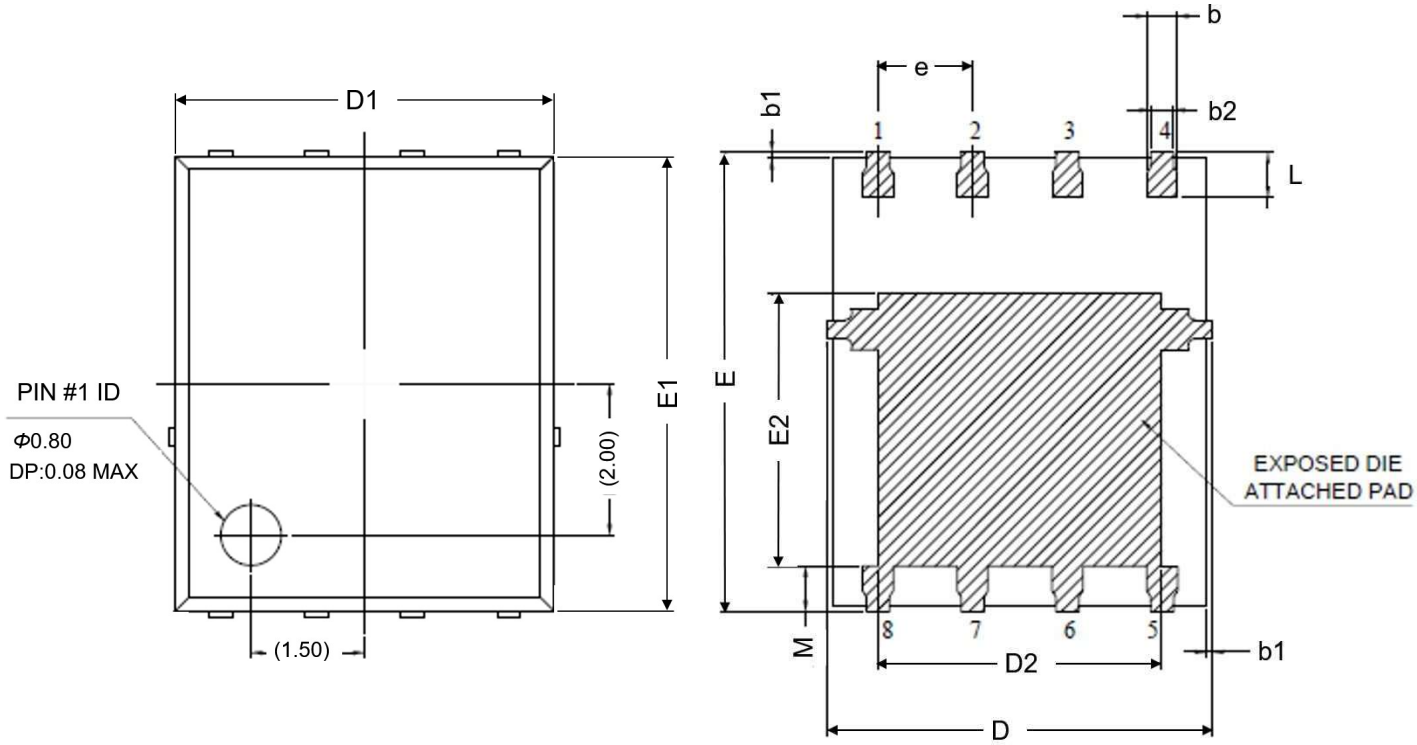

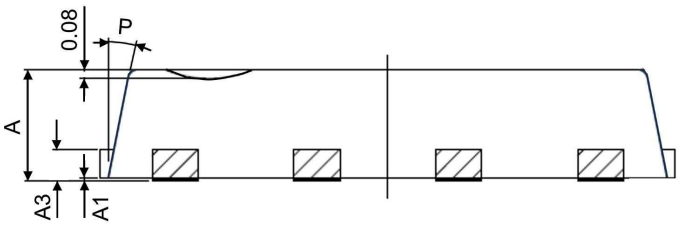

Symbol	Min	Nom	Max
A	0.95		1.05
A1	0.00		0.05
A3		0.25 REF	
b	0.31		0.51
b1	0.03		0.13
b2	0.21		0.41
D		5.15 BSC	
D1		5.00 BSC	
D2	3.7		3.9
E		6.15 BSC	
E1		6.00 BSC	
E2	3.56		3.76
e		1.27 BSC	
L	0.51		0.71
M	0.51		0.71
P	10°		12°

Marking Information

YY = Last two digits of the year

WW = Work week

* = Site ID

XXXXX = Lot ID

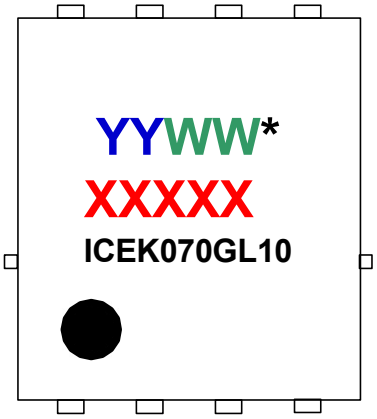

ICEK070GL10 = ICE is IceMOS logo and K070GL10 is a designated device part number

Disclaimer

Information contained in this data sheet shall in no event be regarded as a guarantee of conditions or characteristics. All product, data sheet are subject to change without notice to improve reliability. ICEMOS technology will not be responsible for damages of any nature resulting from the use or reliance upon the information contained in this data sheet.